

CUTMAC®


EN 609-1:2017









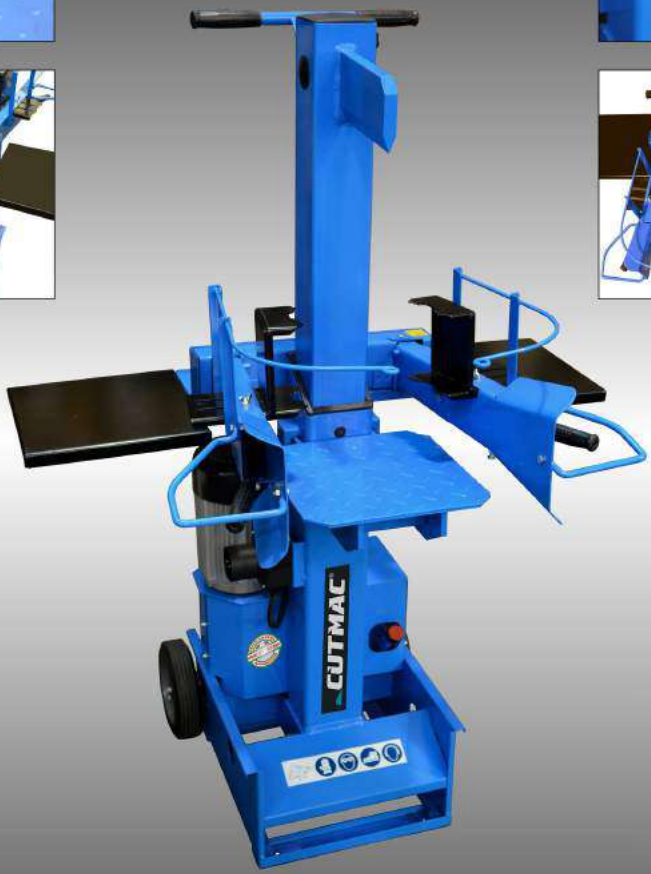

CE

GUARANTEED QUALITY TESTED APPROVED

SVG700 PLUS

VERTICAL
VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO:	CUT CAPACITY: ALTEZZA TAGLIO:	OIL QUANTITY: QUANTITÀ OLIO:	WEDGE STROKE: CORSA COLONNA:	WEIGHT: PESO:
500 mm	540 mm	5 l	ADJUSTABLE / REGOLABILE	120 kg

CODE	VERSION	TECHNICAL DATA	TONS	MEASURES:
810041	SVG700 220 PLUS	EL. HP3 (2,2 kW) - 220 V - PS	6,90	70X65X112 cm

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.
LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

DOCMA